

Approvals:



BEAB



WRAS Approved



CE

The Active 320 range - Contemporary 'S-line' styling with Smart technology

Key features

Contemporary 'S-line' styling with Smart technology

- Fully Temperature stabilised with 'Smart Stop' hot water purge
- Available in 7.2kW or 8.5kW models
- 3 power settings with LED power on indicator
- Dual concentric rotary controls for on/off and power selection
- Finished in polar white with chrome accent and high quality chrome accessories
- Single mode rub clean hand set and full accessory kit including soap dish, hose retaining ring, riser rail and adjustable clamp
- Top, bottom or rear entry access for cable and cold water supply
- Rotary controls for power and temperature selection
- Height adjustable riser rail and soap dish
- Electric solenoid operation on/off
- Overheat protection

The range

The Active 320S has a unique dual control combining power select and on/off rotary flow/temperature control. Comes complete with single mode handset, riser rail kit all in chrome.

Models

- Operating water pressure 0.7-7 BAR (10-100 psi)
- Water pressure operated power switch
- Standard 15mm inlet connection
- Top, bottom or rear cable entry
- Top, bottom or rear water entry
- Fixing pack supplied
- Shallow backplate designed for ease of installation
- The second and final year of the guarantee is only available for products registered with Redring after purchase


Product variations

Short code	Catalogue number	Heat setting (kW)	kW loading @ 230-240V	Recommended Cable Size (mm ²)	Recommended Fuse Rating (amps)
A3208S	53671001	3.7 / 4.8 / 8.5	7.8 - 8.5	6 / 10mm ²	40amps
A3207	53670501	2.7 / 4.5 / 7.2	6.6 - 7.2	4 / 6 mm ²	30amps



Active 320S 8.5:

Dimensions

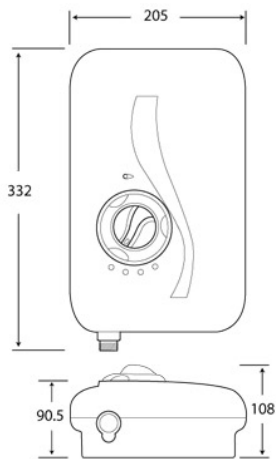

Footprint of backplate = 177mm x 302mm

Dimensions: