

Approvals:



IPX4 rated



CE

Electronic panel heaters

Key features

- Contemporary radiator styling
- Electronic thermostatic control, accurate to +/-0.3°C
- Convected heat for rapid warm up
- Silent operation
- Pre-set background temperature at 5°C below thermostat setting (when connected to a programming unit supporting setback feature)
- Hidden thermostat range limiter feature - for additional economy
- Range of optional plug-in electronic timer modules, including:
 - 24 hour digital timer (Model TPR E24T)
 - Single zone 7 day pilot wire programmer (Model TPR E7DT)
 - Runback timer (Model TPR ERBT)
- Compatible with Creda 4 zone pilot wire central controller



The range

The Contour100 panel heater range offers high quality build and panel finish with contemporary radiator styling. Contour 100 panel heaters incorporate electronic thermostatic controls which allow very precise regulation of room temperatures.

As the room temperature nears the desired set point, power to the elements is reduced. The room temperature is closely monitored to an accuracy of less than 0.3°C, minimising overshoot and temperature drift, resulting in better energy efficiency and user comfort.

Controllers

TPR E24T - 24 hour digital timer. Provides 24 hour programmable on/off control.

TPR E7DT - single zone, pilot wire programmer controls up to 10 slave heaters. Provides 7 day programmable on/off control.

TPR ERBT - runback timer. Provides installer programmable runback time up to 4 hours (in 30 minute increments). Can be locked into heater.

PW E4ZC - 4 zone pilot wire central controller.

- Allows 7 day programming of comfort/setback time settings of multiple pilot wire linked heaters in up to 4 separate zones.


Technical specification

- Elements - finned, mineral-filled sheath type
- Thermostat - electronic with 5°C setback control capability
- Finish - white powder coated steel and thermoplastic
- Protection - auto reset thermal cutout
- Cable - 1.2 metres, 4 core (live, neutral, pilot and earth)
- IP rating - IPX4 (splashproof)
- Supply - 230/240V AC single phase

Product variations

	CEP500E	CEP750E	CEP1000E	CEP1500E	CEP2000E
Code					
Rating	0.5kW	0.75kW	1kW	1.5kW	2.0kW
Height (A)	536mm	536mm	536mm	536mm	536mm
Width (B)	503mm	503mm	671mm	741mm	911mm
Depth (C)	104mm	104mm	104mm	104mm	104mm
Weight	12kg	12kg	15kg	17.5kg	22kg

CEP500E:

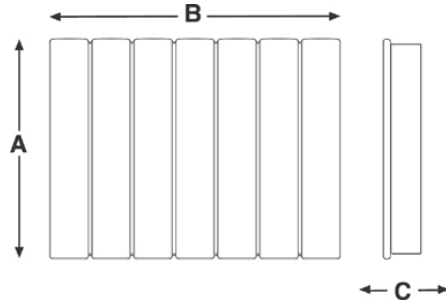

Dimensions:

Wiring: 4 Zone Pilot Wire Controller - PW
E4ZC